



220-240 V | LED |  | IP66 | IK09 | 

TECHNICAL PARAMETERS


Index:	906275
Ingress protection:	IP66
Impact resistance:	IK09
Luminous flux [lm]*:	9000
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	A++
Diffuser type:	MAT

*Tolerance +/- 10%

CHARACTERISTICS

APPLICATION

LIGHT CURVES

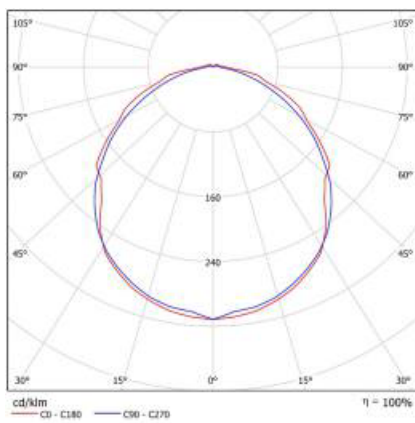

TYTAN LED 1150MM 9000LM IP66 840 (56W)

BARS

TECHNICAL PARAMETERS TABLE

Light source:	LED GO!	Ingress protection:	IP66
Nominal power [W]:	56	Mounting version:	surface, suspended
Supply voltage [V]:	220 - 240	Working temperature [°C]:	from -20 to +35
Frequency [Hz]:	50 - 60	Net weight of the luminaire [kg]:	1.420
Luminous flux [lm]:	9000	ENEC Certificate:	PL BBJ/011/2017
Luminous efficacy [lm/W]:	145	CE certificate:	27/2018
Energy efficiency class:	A++	Mark D:	yes
Electrical protection class:	I	PZH certificate:	HK/K/D199/01/2017
Colour temperature [K]:	4000	Index:	906275
Colour rendering index:	>80	EAN:	5905963906275
SDCM:	≤ 3	Category type:	battens
Power factor:	0.90	Category of application:	commercial, industrial
LED lifespan L70B50 [h]:	100000	Warranty [years]:	5
Beam angle [°]:	120	Rated power of the luminaire [W]:	60.50
Diffuser material:	PC	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser type:	MAT		
Material of the body:	PC		
Colour of the body:	grey		
Dimensions [mm]:	1152/85/80		
Impact resistance:	IK09		



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



27/2018